

GAS SAFETY IN EVERY ENVIRONMENT.

**The UK's leading designer, manufacturer and supplier of
the latest range of gas safety products.**

Ranges include; gas ventilation and gas interlock systems for use in commercial kitchens, gas pressure proving systems and gas detection systems for school laboratories and boiler houses.
Designed and manufactured in the UK.



40+ Years Industry Experience



Easy to Install Solutions



3 Year Product Warranty



24/7 Tech Back Up



Fully Trained Sales Engineers



Express Delivery Available

Office information

For your local sales manager contact S&S Northern Ltd



Head Office
 S&S Northern Ltd
 Wallace Francis House
 Barnes Wallis Way
 Buckshaw Village
 Chorley
 Lancashire
 PR7 7JN

T +44 (0) 1257 470 983
 E info@snsnorthern.com

Contents



- | | | |
|--|---|---|
| <p>8-9. Kitchen Introduction</p> <ul style="list-style-type: none"> 10. 3000S Energy Saving Demand Controlled Ventilation System 11. CT1750 Solid Fuel Gas Safety System 12. CT1650+ Intelligent Current Monitoring Interlock System 13. CT1250X Intelligent Current Monitoring Interlock System 14. CT1200S Gas Interlock System (2 Fan Inputs) 15. 2000X Gas Proving & Current Monitoring System (4 Fan Inputs) 16. 2000X+ Gas Proving, Current Monitoring & Electric Isolation System (4 Fan Inputs) 17. 2000XW+ Gas Proving, Current Monitoring, Electric & Water Isolation System (4 Fan Inputs) 18. 1500S Gas Interlock System (4 Fan Inputs) | <p>20-21. Science Lab Introduction</p> <ul style="list-style-type: none"> 24. 1000VW+ Gas Proving, Electric & Water Isolation, Fan Interlock 25. 1000V+ Gas Proving & Electric Isolation, Fan Interlock 26. 1000V Gas Proving, Fan Interlock | <p>28-29. Boiler Room Introduction</p> <ul style="list-style-type: none"> 30. GDPX+ Gas Proving & Detection with remote monitoring (16 Zone) 31. GDP2X Gas Detection (2 Zone) 32. 1000BH Gas Proving & Detection (2 Zone) 33. GDP2 Gas Detection (2 Zone) 34. 500S Utility Isolation Panel |
|--|---|---|




- | | | |
|--|---|--|
| <p>36-37. Detectors Introduction</p> <ul style="list-style-type: none"> 38. Detector IS Gas Detector for BMS integration 39. Detector I Gas Detector for BMS integration 40. Detector Gas Detector GDP 41. Detector X Gas Detector X 42. CO2-X Carbon Dioxide Monitor (Screen) 43. CO2-C1 Carbon Dioxide Detector (No Screen) 44. CO2 Desktop White Air Quality Monitor 44. CO2 Desktop Black Air Quality Monitor 45. CH4COTFT Mini Merlin Combined Natural Gas & Carbon Monoxide Monitor | <p>46-47. Water Leak Introduction</p> <ul style="list-style-type: none"> 48. Cold Water Meter 48. Hot Water Meter 49. Merlin WDP Water Leak Monitoring System 49. PIR Sensor | <p>50-51. Ancillaries Introduction</p> <ul style="list-style-type: none"> 52. FAB-1 Fire Alarm Bypass 52. Emergency Stop Break glass emergency Knock-Off Button 53. Fusible Link Heat Detector 53. Sounder Alarm Beacon (Audible & Visual) 54. Air Pressure Switch 54. Gas Solenoid Valve 55. Water Solenoid Valve 55. Gas Proving Transmitter 56. DPM2 Dual Gas Pressure Transmitter Module 56. PM2+ Intelligent Dual Current Monitor 57. CS1/CS2 Dual Current Monitor 57. Optical Sensor Canopy Mounted Smoke/Steam Sensor 58. Duct Thermostat Duct Mounted Temperature 58. Inverter Single Phase & Three Phase 59. Speed Controller Single Phase 59. Gas Meter In-Line 60. Water Meter 60. Heat Meter 61. CPI Switch For Gas Solenoid Valves 61. Bump Test Kit |
|--|---|--|

Product key features

The benefits of each of our products are illustrated in an icon format throughout this brochure, aiding you to select the product and design features most suited for your requirements.

The icons are located at the top of each product page with accompanying detail for ease of reference and comparison of the solutions we have available.

If you have any questions about any products and their features please contact info@snsnorthern.com.

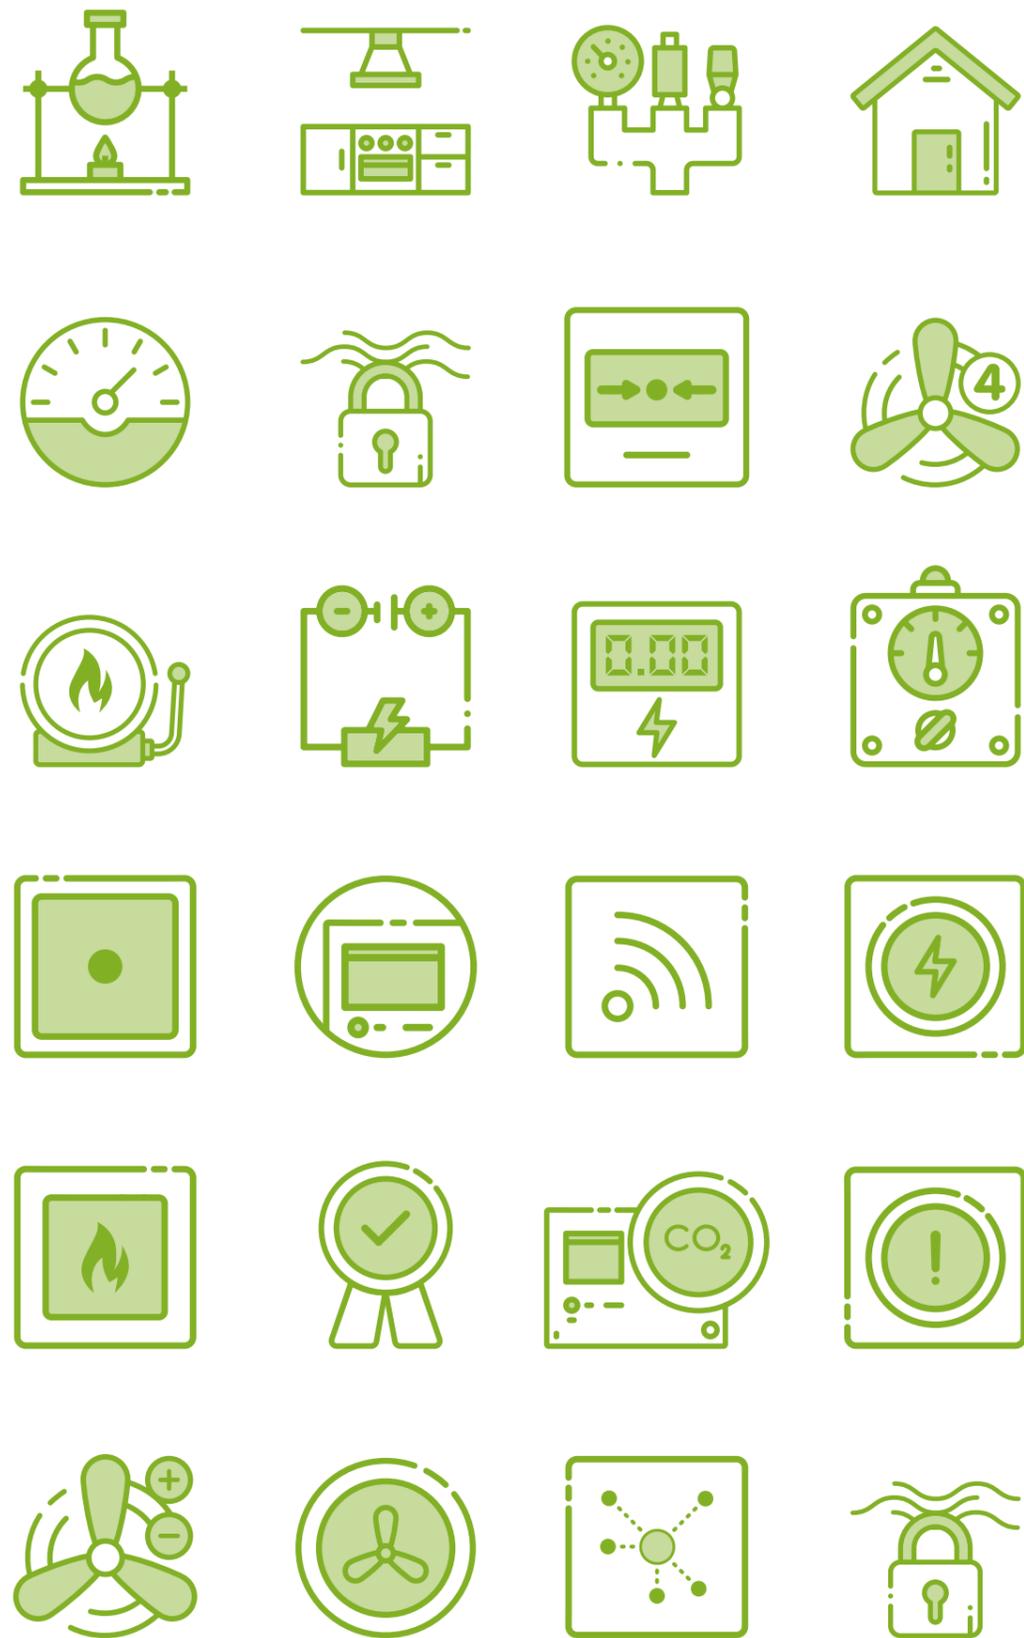

Kitchens

S&S Northern have a range of gas interlock and environmental monitors to meet all of the latest gas and ventilation regulations for commercial kitchens. We have industry leading range of products, from a simple gas interlock system to our advanced demand controlled kitchen ventilation systems and environmental monitors.



PAGES
8-19



Merlin 3000S System

- 
Energy saving variable ventilation
- 
Gas proving feature
- 
Solid fuel protection
- 
Designed to DW172, BS6173 & IGEM/UP19 standards
- 
Extraction system that minimises heat loss



ENERGY SAVING DEMAND CONTROLLED VENTILATION SYSTEM



The Merlin 3000S energy saving system is a combined demand controlled ventilation system with built in gas interlock and optional gas proving.

The 3000S system automatically adjusts the speed of the ventilation based on the kitchen environment.

The ventilation is automatically controlled based on the carbon dioxide levels, smoke/steam present in the canopy, carbon monoxide, real time gas usage and temperature.

This system can offer large financial savings and short payback periods for any commercial kitchen.

Additional features
Saves energy by varying the ventilation speed via 0-10v DC output. This reduces manual ventilation control.

OFTEN USED WITH

Gas Solenoid valve
Page 54

PM2+ Current Monitor
Page 56

CO2-X
Page 42

Carbon Monoxide detectors
Page 36

Optical Sensor
Page 57

Duct Thermostat
Page 58

TBX Gas Meter
Page 59

Inverter
Page 58

*Please note before ordering the ventilation system / inverter must accept a 0-10v DC control signal.

Merlin CT1750 System

- 
Ventilation control for up to two fans
- 
Gas proving feature*
- 
Out of hours Solid fuel protection
- 
Designed to DW172, BS6173 and IGEM/UP19 standards
- 
Fire Alarm Input & BMS Output
- 
External gas detector

OFTEN USED WITH

Gas Solenoid valve
Page 54

PM2+ Current Monitor
Page 56

CO2-X
Page 42

Carbon Monoxide detectors
Page 36

Inverter
Page 58



The Merlin CT1750 System is a gas interlock and manual ventilation control system designed for commercial kitchens. The Merlin CT1750 System comes with two variable fan speed controllers (0-10V output) to control the speed of 2 fans via an inverter.

The Merlin CT1750 System works with carbon dioxide monitors and carbon monoxide detectors to increase the speed of the ventilation when these gases are present, both in and out of working hours.

*Please note before ordering the ventilation system / inverter must accept a 0-10v DC control signal.

Commonly used in kitchens with solid fuel appliances.

Additional features
Can control the ventilation via 0-10V output.

*Transmitter supplied separately

SOLID FUEL GAS SAFETY SYSTEM

Merlin CT1650+ System

- 
 Monitor up to four fans
- 
 Built in LCD current monitors
- 
 Suitable with both single phase and three phase fans
- 
 Designed to BS6173 & IGEM/UP19 standards
- 
 Fire Alarm Input & BMS output

INTELLIGENT CURRENT MONITORING INTERLOCK SYSTEM



The Merlin CT1650+ System is a current monitoring interlock system for commercial kitchens. This comes with two built in intelligent current monitors.

The Merlin 1650+ has the facility to interlock with two additional fans via remote current monitors PM2+ / CS1-2) or air pressure differential switches. The 1650+ is commonly used with a carbon dioxide monitor.

- Additional features**
- Intelligent Current Monitors to set "high" and "low" parameters.
 - Current Monitors parameters 0.2amp to 20amp.
 - Adjustable sensitivity threshold to reduce nuisance drop outs.
 - Fan start stop output (12v output when on).

- OFTEN USED WITH**
- Gas Solenoid valve
Page 54
 - CO2-X
Page 42
 - Emergency Stop
Page 52
 - Speed Controller
Page 59

Merlin CT1250X System

- 
 Monitor up to four fans
- 
 Built in LCD current monitors
- 
 Suitable with both single phase and three phase fans.
- 
 Designed to BS6173 & IGEM/UP19 standards
- 
 Fire Alarm Input & BMS Output

- OFTEN USED WITH**
- Gas Solenoid valve
Page 54
 - Emergency Stop
Page 52
 - Speed Controller
Page 59



The Merlin CT1250X System is a current monitoring interlock system for commercial kitchens. This comes with two built in intelligent current monitors.

The Merlin CT1250X has the facility to interlock with two additional fans via remote current monitors (CS1-2) or air pressure differential switches.

- Additional features**
- Intelligent Current Monitors to set "high" and "low" parameters.
 - Current Monitors parameters 0.2amp to 18amp.
 - Adjustable sensitivity threshold to reduce nuisance drop outs.

CURRENT MONITORING INTERLOCK SYSTEM

Merlin CT1200S System

- 
Monitor up to two fans
- 
Integral Emergency Stop
- 
Designed to BS6173 & IGEM/UP19 standards
- 
Fire Alarm Input & BMS output

GAS INTERLOCK SYSTEM
(2 FAN INPUTS)



The Merlin CT1200S System is a gas interlock system for commercial kitchens. This can monitor ventilation using air pressure differential switches or external current switches.

Additional features

- Facility to interlock using current switches or air pressure differential switches.
- 10 Second Nuisance Tripping Delay

- OFTEN USED WITH
- Gas Solenoid valve
Page 54
 - Air Pressure Differential Switch
Page 54
 - Emergency Stop
Page 52
 - Speed Controller
Page 59

Merlin 2000X System

- 
Monitor up to four fans
- 
Built in LCD current monitors
- 
Gas proving feature*
- 
Designed to BS6173 & IGEM/UP19 standards
- 
Fire Alarm Input & BMS Output
- 
External gas detector

- OFTEN USED WITH
- Gas Solenoid valve
Page 54
 - Merlin CO2-X
Page 42
 - Merlin Gas Detectors
Page 36
 - PM2+ Current Monitor
Page 56
 - Air Pressure Differential Switch
Page 54



The Merlin 2000X is a ventilation interlock and gas proving system for commercial kitchens and includes two built in intelligent current monitors.

The Merlin 2000X comes with a gas pressure transmitter included for commercial kitchens where gas appliances don't have flame failure devices. The Merlin 2000X System works with external current monitors or air pressure differential switches, the system can also interface with various gas detectors.

Additional features

- Intelligent Current Monitors to set "high" and "low" parameters.
- Current Monitors parameters 0.2amp to 20amp.
- Adjustable sensitivity threshold to reduce nuisance drop outs.
- Fan start stop output (12v output when on).
- Facility to interlock using external current switches or air pressure differential switches (4 fans)
- Works with gas detectors and Carbon monoxide monitors
- *Transmitter included

GAS PROVING SYSTEM
(4 FAN INPUTS)

Merlin 2000X+ System



Monitor up to four fans

Gas proving feature*

Designed to BS6173 & IGEM/UP19 standards

Fire Alarm Input & BMS Output

External gas detector

GAS PROVING SYSTEM (4 FAN INPUTS)



The Merlin 2000X+ is a ventilation interlock and gas proving system with electrical isolation, designed for commercial kitchens and includes two built in intelligent current monitors.

The Merlin 2000X+ comes with a gas pressure transmitter included for commercial kitchens where gas appliances don't have flame failure devices. The Merlin 2000X+ System works with external current monitors or air pressure differential switches, the system can also interface with various gas detectors.

Additional features

- Intelligent Current Monitors to set "high" and "low" parameters.
 - Current Monitors parameters 0.2amp to 20amp.
 - Adjustable sensitivity threshold to reduce nuisance drop outs.
 - Fan start stop output (12v output when on).
 - Facility to interlock using external current switches or air pressure differential switches (4 fans)
 - Works with gas detectors and Carbon monoxide monitors
 - Electrical Isolation
- *Transmitter included

OFTEN USED WITH

Gas Solenoid valve
Page 54Merlin CO2-X
Page 42Merlin Gas Detectors
Page 36PM2+ Current Monitor
Page 56Air Pressure Differential Switch
Page 54

Merlin 2000XW+ System



Monitor up to four fans

Gas proving feature*

Designed to BS6173 & IGEM/UP19 standards

Fire Alarm Input & BMS Output

External gas detector

OFTEN USED WITH

Gas Solenoid valve
Page 54Merlin CO2-X
Page 42Merlin Gas Detectors
Page 36PM2+ Current Monitor
Page 56Air Pressure Differential Switch
Page 54

The Merlin 2000XW+ is a ventilation interlock and gas proving system with electrical & water isolation. This controller is designed for commercial kitchens and includes two built in intelligent current monitors.

The Merlin 2000XW+ comes with a gas pressure transmitter included for commercial kitchens where gas appliances don't have flame failure devices. The Merlin 2000XW+ System works with external current monitors or air pressure differential switches, the system can also interface with various gas detectors.

Additional features

- Intelligent Current Monitors to set "high" and "low" parameters.
 - Current Monitors parameters 0.2amp to 20amp.
 - Adjustable sensitivity threshold to reduce nuisance drop outs.
 - Fan start stop output (12v output when on).
 - Facility to interlock using external current switches or air pressure differential switches (4 fans)
 - Works with gas detectors and Carbon monoxide monitors
 - Electrical & Water Isolation
- *Transmitter included

GAS PROVING SYSTEM (4 FAN INPUTS)

Merlin 1500S System



Integral
Emergency
Stop



Designed to
BS6173 & IGEM/
UP19 standards



Fire Alarm
Input & BMS
Output



External gas
detector

GAS INTERLOCK
SYSTEM
(4 FAN INPUTS)



Merlin 1500S System can be used with external current monitors or air pressure differential switches.

Additional features

- Facility to interlock with external current switches or air pressure differential switches (4 fans)
- Works with Carbon Dioxide and Carbon monoxide monitors

OFTEN
USED
WITH

Gas Solenoid
valve
Page 54

Merlin CO2-X
Page 42

PM2+ Current
Monitor
Page 56

Air Pressure
Differential
Switch
Page 54



Science Lab


S&S Northern have a range of gas proving systems for educational establishments. Our systems protect Laboratories, food tech and design tech classrooms. We also have products that protect laboratories that have speciality or high pressure gases.



PAGES
20-27

**COMPACT,
ROBUST &
RELIABLE**

Gas pressure proving systems

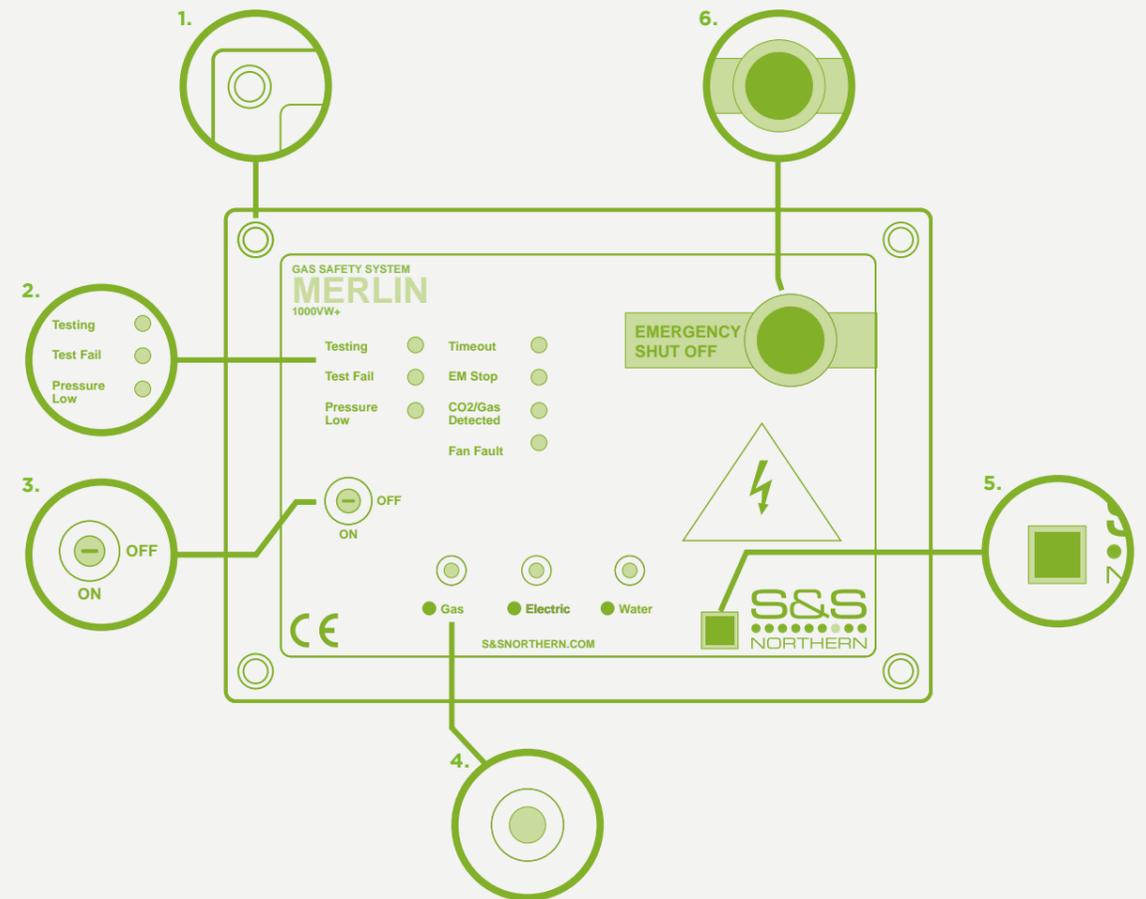

- ✓ Incredibly easy to use and install
- ✓ Adjustable time out facility
- ✓ Industrial grade polycarbonate material to withstand daily use
- ✓ Meets IGEM/UP11

1. Modern design

Slim compact enclosure

2. Clear status indication

For each utility

3. Quick operation

Keyed authority ON/OFF Alarm reset

4. Robust control

Touch sensitive buttons

5. Ease of access

Power indication and QR code for easy access to manuals

6. Emergency stop button

Recessed panic button eliminates accidental shut down

Merlin 1000 VW+

- 
Ventilation interlock
- 
Integral Emergency Stop
- 
Isolates gas, water and electric (via contactor)
- 
Designed to IGEM/UP11 standards
- 
Fire Alarm Input & BMS Output
- 
Gas proving feature*

GAS PROVING,
ELECTRIC
& WATER
ISOLATION, FAN
INTERLOCK



The Merlin 1000VW+ gas pressure proving, electric and water isolation system is designed specifically for use in educational buildings and Laboratories. The 1000VW+ can also interlock any mechanical ventilation.

Additional features

- Facility to interlock with the ventilation units.
- Gas valve output
- Low Pressure Monitoring for incoming gas supply
- Works with Carbon Dioxide Monitor

*Gas pressure transmitter included

- OFTEN USED WITH
- Gas Solenoid valve
Page 54
 - Water Solenoid Valve
Page 55
 - Merlin CO2-X
Page 42
 - Air Pressure Differential Switch
Page 54

Merlin 1000V+

- 
Ventilation interlock
- 
Integral Emergency Stop
- 
Isolates gas and electric (via contactor)
- 
Designed to IGEM/UP11 standards
- 
Fire Alarm Input & BMS Output
- 
Gas proving feature*

- OFTEN USED WITH
- Gas Solenoid valve
Page 54
 - Merlin CO2-X
Page 42
 - Air Pressure Differential Switch
Page 54
 - Emergency Stop
Page 52



The Merlin 1000V+ gas pressure proving and electric isolation system is designed specifically for use in educational buildings and Laboratories with ventilation interlocking between the ventilation system and the gas solenoid valve. The system is compatible with external current monitors or air pressure differential switches in order to interlock with the ventilation units.

Additional features

- Facility to interlock with ventilation units.
- Gas valve output
- Low Pressure Monitoring for incoming gas supply
- Works with Carbon Dioxide Monitor

GAS PROVING,
ELECTRIC
ISOLATION, FAN
INTERLOCK

Merlin 1000V



Ventilation
interlock



Integral
Emergency
Stop



Designed to
IGEM/UP11
standards



Fire Alarm
Input & BMS
Output



Gas proving
feature*

GAS
PROVING, FAN
INTERLOCK



The Merlin 1000V+ gas pressure proving system is designed specifically for use in educational buildings and Laboratories with ventilation interlocking between the ventilation system and the gas solenoid valve. The system is compatible with external current monitors or air pressure differential switches in order to interlock with the ventilation units.

Additional features

- Facility to interlock using current switches or air pressure differential switches (4 fans)
- Gas valve output
- Low Pressure Monitoring for incoming gas supply
- Works with Carbon Dioxide Monitor

*Gas pressure transmitter included

OFTEN
USED
WITH

Gas Solenoid
valve
Page 54

Merlin CO2-X
Page 42

Air Pressure
Differential
Switch
Page 54

Emergency
Stop
Page 52





Boiler Room

S&S Northern have a solution for every commercial Plant room application. We offer a wide range of control panels, gas detectors, heat sensors and gas solenoid valves. Whether your project is a small residential application or a large scale plant room we have the knowledge and experience to offer the perfect products. Remote monitoring, Modbus and data logging are available on our GDPX Range.

PAGES
28-35

Merlin GDPX+



Remote monitoring LAN connection



Integral Emergency Stop



Meets all latest standards



In built fire alarm bypass mode



Gas proving feature*



Connections for BMS and Modbus outputs

GAS PROVING & DETECTION WITH REMOTE MONITORING (16 DETECTORS)



The Merlin GDPX+ is a multi-zone gas detection panel which can be used in many applications such as boiler house/ Plant rooms, factories, car parks and high rise. It can be used with up to 16 Merlin gas detectors for monitoring and detecting gas including carbon monoxide, LPG, Natural Gas, Oxygen and Hydrogen.

The GDPX+ can be remotely monitored from www.snsnorthern.com so you can monitor the status of your sites from your computer or smartphone.

Additional features

- Internet enabled (LAN)
- Remote monitoring LAN connection using snsnorthern.com portal
- Can be used with up to 16 gas detectors
- Connections for heat detectors/thermal links
- Two spare Input Connections (for additional detectors, fans, equipment)

*Gas pressure transmitter included

OFTEN USED WITH

Gas Solenoid valve
Page 54

Natural Gas – X Detector
Page 41

Carbon Monoxide – X Detector
Page 41

LPG – X Detector
Page 41

Fusible Link
Page 53

Emergency Stop
Page 52

Merlin GDP2X



Integral Emergency Stop



Meets all latest standards



Fire alarm input



Connections for heat detectors/thermal links

OFTEN USED WITH

Gas Solenoid valve
Page 54

Natural Gas – X Detector
Page 41

Carbon Monoxide – X Detector
Page 41

LPG – X Detector
Page 41

Fusible Link
Page 53

Emergency Stop
Page 52



The Merlin GDP2X is a 2 zone gas detection panel it can be used with up to 8 Merlin gas detectors (model X) for monitoring and detecting gas including carbon monoxide, LPG, Natural Gas, Oxygen and Hydrogen.

Additional features

- Gas valve output
- Can be used with up to 8 gas detectors
- Connection for sounder/strobe

**GAS
DETECTION
(8 DETECTORS)**

Merlin 1000BH

- 
Integral
Emergency
Stop
- 
Meets all latest
standards
- 
Gas proving
feature*
- 
Connections for
heat detectors/
thermal links

GAS PROVING & DETECTION (2 ZONE)



The Merlin 1000BH is a gas pressure proving and gas detection panel for use in plant rooms and boiler houses. This panel is to be used to carry out a gas proving test on the pipe work in order to highlight if there is a gas appliance open or a gas leak. The Merlin 1000BH is designed to give the user full control over the incoming gas supply with the lockable keyswitch operation.

- Additional features**
- Gas valve output
 - Can be used with two gas detectors
 - Connections for BMS
- *Gas pressure transmitter included

- OFTEN USED WITH
- Gas Solenoid valve
Page 54
 - Natural Gas Detector
Page 40
 - Carbon Monoxide Detector
Page 40
 - LPG Detector
Page 40
 - Fusible Link
Page 53
 - Emergency Stop
Page 52

Merlin GDP2

- 
Integral
Emergency
Stop
- 
Meets all latest
standards
- 
Connections for
heat detectors/
thermal links

- OFTEN USED WITH
- Gas Solenoid valve
Page 54
 - Natural Gas Detector
Page 40
 - Carbon Monoxide Detector
Page 40
 - LPG Detector
Page 40
 - Fusible Link
Page 53
 - Emergency Stop
Page 52



The Merlin GDP2 is a two zone gas detection panel which can be used in many applications such as factories, car parks, shopping centres and most commonly - boiler houses.

- Additional features**
- Gas valve output
 - Can be used with up to 6 gas detectors
 - Connections for BMS
 - Connection for sounder/strobe

GAS DETECTION (2 ZONE)

Merlin 500S



Clear digital display for system indications



Meets all latest standards



Connections for heat detectors/thermal links

UTILITY ISOLATION PANEL



The Merlin panel is designed to provide the user with an effective means of isolating the utility, via a key switch or in the event of an emergency, by operation of the emergency shut off button. The 500S has a fascia mounted emergency shut off button fitted as standard and the fascia mounted LEDs give simple and concise information to the operator. The panel is fully compatible with S&S Northern remote emergency stop terminals allowing a large number of emergency terminals to be connected in series and wired back to the panel.

Additional features

- Easy installation
- Covered by S&S Northern Ltd 3 year warranty

OFTEN USED WITH

Gas Solenoid valve
Page 54

Fusible Link
Page 53

Emergency Stop
Page 52



Detectors

S&S Northern manufacture a wide range of gas detectors for monitoring air quality, toxic gases, explosive and flammable gases. They are designed to be easy to install and maintained. Each target gas has unique characteristics and therefore the detector needs to be installed to suit the target gas, please contact us or have a look on our website for mounting height information and advice on installation.



PAGES
36-45

Detector-iS



Clear digital display



Automatic alarm



24VAC/DC powered.



Fan controller enabled relay output



Traffic Light Indication Display



Automatic alarm



24VAC/DC powered.



Fan controller enabled relay output

GAS DETECTOR WITH VARIABLE OUTPUTS SUITABLE FOR BMS INTERFACE - TFT SCREEN



The Detector iS range is used in various applications such as boiler/ plant rooms, hospitals, laboratories and high rise buildings. These sensors are specifically built to work with all Merlin control panels and can also be used direct with BMS control panels.

The clear digital display allows the user to clearly see the current gas levels and the traffic light indicator will summarise the gas levels - Green Safe, Yellow - Attention, Red - Danger

Gases Available:

Natural Gas, Carbon Monoxide, LPG, CO₂, Refrigerant, Oxygen, NO₂, Hydrogen

Additional features

- 24VAC/DC
- PPM/LEL on TFT screen with Traffic Light Colours
- Audible Alarm
- 2 x Relay Output: 1 x Pre Alarm, 1 x Alarm
- 1 x CL Connection for GDP Range
- 0-10V output linear scale to full range
- End of Life Reminder

CO₂ Version available as above with the following additions:

- 1 x Dipswitch to change linear 0-10V output between 2 ranges: 1-2000ppm and 0-5000ppm
- 2 x Dipswitches for Alarm Settings - 1000ppm, 1500ppm, 2800ppm and 4500ppm.
- 1 x Dipswitch for Audible Alarm On/Off
- 1 x Dipswitch - Latching - Enable / Disabled

Detector-i



The Detector i range is used in various applications such as boiler/ plant rooms, hospitals, laboratories and high rise buildings. These sensors are specifically built to work with all Merlin control panels and can also be used direct with BMS control panels.

The traffic light indicator will summarise the gas levels – Green Safe, Yellow - Attention, Red - Danger

Gases Available:

Natural Gas, Carbon Monoxide, LPG, CO₂, Refrigerant, Oxygen, NO₂, Hydrogen

Additional features

- 24VAC/DC
- Traffic Light Indication
- Audible Alarm
- 2 x Relay Output: 1 x Pre Alarm, 1 x Alarm
- 1 x CL Connection for GDP Range
- 0-10V output linear scale to full range
- End of Life Reminder

CO₂ Version available as above with the following additions:

- 1 x Dipswitch to change linear 0-10V output between 2 ranges: 1-2000ppm and 0-5000ppm
- 2 x Dipswitches for Alarm Settings - 1000ppm, 1500ppm, 2800ppm and 4500ppm.
- 1 x Dipswitch for Audible Alarm On/Off
- 1 x Dipswitch - Latching - Enable / Disabled

GAS DETECTOR WITH VARIABLE OUTPUTS SUITABLE FOR BMS INTERFACE - WITHOUT SCREEN

Detector



Traffic Light
Indication Display



Designed to
IGEM/UP11
standards



Low voltage
input



Clear digital
display with
traffic light
feature



Automatic
alarm



24VAC/DC
powered.

GAS DETECTOR
WITH VFC OUTPUT



The Detector range are used in various applications such as boiler/plant rooms, hospitals, laboratories and high rise buildings.

These sensors are specifically built to work with all Merlin control panels and can also be used direct with BMS control panels.

The traffic light indicator will summarize the gas levels:

Green Safe
Yellow - Attention
Red - Danger

Gases Available:

Natural Gas, Carbon Monoxide, LPG, CO2, Refrigerant, Oxygen, NO2

Additional features

- 24VAC/DC
- Audible Alarm
- 1 x VFC at High Level Alarm
- 1 x CL Connection for GDP Range

Detector X



GAS DETECTOR
WITH VFC OUTPUT -
WITH SCREEN

The Detector X range are used in various applications such as boiler/plant rooms, hospitals, laboratories and high rise buildings.

These sensors are specifically built to work with all Merlin control panels and can also be used direct with BMS control panels.

The traffic light indicator will summarize the gas levels:

Green Safe
Yellow - Attention
Red - Danger

Gases Available:

Natural Gas, Carbon Monoxide, LPG, CO2, Refrigerant, Oxygen, NO2

Additional features

- 24VDC
- Traffic Light Indication
- Audible Alarm
- 1 x Relay Output – 1 x Alarm
- 1 x CL Connection for GDP Range
- MODBUS Output
- Calibration Service and End of Life Reminder

CO2-X Monitor



Clear digital display



Designed specifically for BB101



Automatic alarm



12V DC, 24VDC or 230V AC powered.



Fan controller enabled relay output



CARBON
DIOXIDE
MONITOR

The CO2-X is a dual powered carbon dioxide and temperature monitor, which has the ability to show average readings over an 8 hour period.

Additional features

- Can automatically change alarm settings based on gas valve activation
- CO2 and temperature levels measured and displayed clearly.

- 2 x 0-10V Signal output.
- Displays average readings of CO2 concentration over an 8 hour period.
- End of life and fault notifications.
- Pre alarm and alarm output.
- Variable CO2 and temperature output



Clear digital display with traffic light feature



Designed to IGEN/UP11 standards



Mains powered



CARBON DIOXIDE
MONITOR
(NO SCREEN)

The budget friendly Merlin CO2-C1 detector is a mains powered monitor to give the end user simplified analysis of the carbon dioxide levels in the surrounding area. The Merlin CO2-C1 has a traffic light colour system (red, amber, green) with high, medium, low indications.

Additional features

- Traffic light display to clearly indicate low, medium and high levels of CO2.
- Low voltage switch when levels of carbon dioxide increase
- Mains powered

Merlin CO2-C1

CO2 Desktop - White



The Merlin CO2 Desktop White Detector is designed specifically for use in classrooms or offices to monitor the air and help improve ventilation.

This low cost unit provides teachers with a clear indication of the CO2 levels, humidity and temperature.

The sensor can be wall mounted or located on the teachers desk. Each unit comes with a 1 meter cable which can plug into the mains plug provided or via your PC USB drive.

Additional features

- NDIR sensor
- Comes with 1m USB cable
- Monitors & displays CO2 levels, humidity & temperature thru a clear LCD display
- Built-in audible alarm
- Meets DfE specification for use in school classrooms

CO2 Desktop - Black



The Merlin CO2 Desktop Black Monitor with NDIR sensor is designed specifically for use in classrooms, offices or any other occupied indoor area, to monitor the air quality and help improve ventilation.

This low cost unit comes complete with a 1 meter cable with a USB connection so it can be powered by your computer or connecting to a standard USB compatible plug.

This monitor provides teachers and end users with a clear indication of the CO2 levels, humidity and temperature and also has a rechargeable lithium battery built in so can be used as a portable device without the need for a constant power supply.

Additional features

- NDIR sensor
- Rechargeable lithium battery back-up
- Comes with 1m USB cable
- Monitors & displays CO2 levels, humidity & temperature thru a clear LCD display
- Built-in audible alarm
- Meets DfE specification for use in school classrooms



Clear digital display with traffic light feature



Mains powered or 24VDC



Gas Level Indicator for both NG and CO

Mini Merlin CH4CO TFT



The Mini Merlin CH4CO TFT for domestic applications.

The Mini Merlin CH4CO TFT is a dual gas sensor carefully designed and tested to monitor levels of natural gas- Methane (NG) and Carbon Monoxide (CO) in the air. If there is a dangerous build-up of gas or unsafe levels of carbon monoxide at the sensor, this device can shut off the gas supply via a gas safety valve.

Additional features

- Dual sensor built into one controller
- End of life notification
- Shuts off gas when in high alarm
- Low voltage input to connect with emergency stops and fire alarms.
- Pre alarm and alarm output
- LPG & CO detector available

COMBINED
NATURAL GAS &
CARBON MONOXIDE
DETECTOR

Water Leak Detection

S&S Northern have a solution for water leak detection & monitoring to help achieve the requirements of 2018 1.0 BREEAM. The WDP system is designed to monitor water flowing through a pulse water meter. If the volume of water reaches the pre-set limit (customer adjustable) the system can isolate the mains water pipe, therefore limiting the amount of water and leak damage.

Cold Water Meter



S&S offer a large range of cold water meters from small domestic type installations to large commercial and industrial properties.

The connections which come with the meters vary with the meter size & type, but connections are available to be added for all sizes for pulsed output, MBUS etc.

- **Compliance** - MID Approved, WRAS Approved
- **Communication Outputs Available** - Pulsed, MBUS, Wireless MBUS
- **Temperature** - Cold
- **Connection Size** - 15mm – 300mm

Hot Water Meter



S&S offer a large range of hot water meters from small domestic type installations to large commercial and industrial properties.

The connections which come with the meters vary with the meter size & type, but connections are available to be added for all sizes for pulsed output, MBUS etc.

- **Compliance** - MID Approved, WRAS Approved
- **Communication Outputs Available** - Pulsed, MBUS, Wireless MBUS
- **Temperature** - Hot
- **Connection Size** - 15mm – 300mm

Water Leak Monitoring

The Merlin WDP is a water leak monitoring system that has been specifically designed to help achieve the requirements of 2018: 1.0 BREEAM UK New construction (non-domestic buildings).

The WDP system will allow designers, M&E contractors and developers to achieve the 'Credit' available to reduce the impact of water leaks that may otherwise go undetected. All the leak detection water meters and solenoid valves are WRAS-approved.

The system is designed to monitor water flowing through a pulse water meter. If the volume of water reaches the pre-set limit (customer adjustable) the system can isolate the mains water pipe, therefore limiting the amount of water and leak damage.



- Achieves one credit from BREEAM WAT 03
- Timer & programmable clock built in
- Two stage monitoring for occupied and unoccupied buildings
- BMS output available
- 2 zone input for reading 2x water meters (boundary and incoming)
- Volt free normally closed input for emergency stop buttons, fire alarm & security systems
- Remote sounder strobe output
- 230VAC & 24VDC outputs for water solenoid valves

PIR Sensor

A range of low cost PIR Sensors for surface, flush and wall mounting.

There are switched live and volt free output variants. The light level can be switched off if required. Mains and low voltage variants.

Features

- Low cost solution
- Flush, surface or wall mounted
- Adjustable Timer
- Optional switched live or volt free outputs





Ancillaries

PAGES
50-61



FAB-1 Fire Alarm bypass



Merlin
GDP-2
Page 33

Merlin
1000BH
Page 32

OFTEN
USED
WITH

The Merlin FAB1 can be integrated with any of the Merlin suite of products to give the operator the opportunity to temporarily bypass the gas isolation system. With prior notice to a fire alarm test, the operator can turn the key to the on position giving an uninterrupted gas supply for between 10 and 45 minutes.

During this time the system controlling the gas will ignore shut-off signals from the buildings fire alarm system and allow factors such as heating systems to remain operational. The bypass time can be adjusted using the blue switches inside the panel. During the bypass time gas can still be shut off, pressing the emergency gas shut off button will close the gas solenoid valve.

Emergency Stop



Merlin
2000X
Page 15

Merlin
3000S
Page 10

Merlin
1000VW+
Page 24

OFTEN
USED
WITH

The Emergency Stop button is used to isolate the gas supply into an area in the event of emergency.

The button is fitted with a Perspex screen which should be pressed to activate, and then can be reset using a key (supplied with every emergency knock-off button). This button can be linked with any Merlin gas safety system to give various means of isolation within an area.

OFTEN
USED
WITH

Merlin
GDP2X
Page 31

Merlin
1000BH
Page 32

Merlin
GDP2
Page 33

Merlin
GDPX+
Page 30

The fusible link is most commonly used in a boiler room application. These are fitted as a means of fire protection, if the boiler room temperature reaches over 72 degrees then the fusible wire inside will melt and therefore send an electronic signal to isolate the gas supply. Multiple fusible links can be fitted in one area.

Fusible Link



Sounder Alarm Beacon



OFTEN
USED
WITH

Merlin
GDP2X
Page 31

Merlin
GDPX+
Page 30

Merlin
GDP2
Page 33

The Sounder Alarm Beacon is a remote alarm beacon most commonly used outside a boiler room. This sounder alarm beacon can give both an audible and visual alarm in the event of an emergency. Various colours are available to suit the application.

Air Pressure Differential Switch

Merlin
CT1200S
Page 14

Merlin
1000V
Page 26

OFTEN
USED
WITH



An air pressure differential switch is a mechanical switch fitted in ductwork which can be used to monitor and check airflow rates. These switches are adjustable and have a range from 20-300PA, they also come with a 1m duct kit to be fitted into the ductwork and detect the airflow.

Gas Solenoid Valve

Merlin
1000BH
Page 32

Merlin
1000V
Page 26

Merlin
2000X
Page 15

OFTEN
USED
WITH



Our gas solenoid valves are 230V powered, normally closed, auto-reset and will most commonly be powered from our Merlin gas safety systems. In the event of an emergency, the Merlin gas safety system will take power away from the gas solenoid valve causing it to slam shut, and when power is re-instated this will then allow gas to flow through the pipework.

We have a full range of sizes available, both screwed and flanged, and can offer specialist gas valves on request.

Water Solenoid Valve

OFTEN
USED
WITH

Merlin
1000VW+
Page 24



Our water solenoid valves are most commonly found in science laboratories where the teachers want full control of the water supply to the benches, but they can be used in a range of applications.

Similar to a gas solenoid valve, our water solenoid valves are normally closed, auto-reset and 230V so they can be controlled by the Merlin gas safety systems.

Once again, we have a full range of sizes available, WRAS approved and can offer specialist types on request.

Pressure Transducer

OFTEN
USED
WITH

Merlin
GDPX+
Page 30

Merlin
1000V
Page 26

Merlin
2000X
Page 15



A transmitter used to check for leaks in the gas line, by detecting pressure drops from the downstream port of the gas solenoid valve.

DPM2

Merlin
2000X
Page 15

Merlin
1000V
Page 26

Merlin
1000BH
Page 32

OFTEN
USED
WITH



The DPM-2 is a dual pressure monitor which enables connection of two gas solenoid valves and two pressure sensors to any Merlin gas proving panels.

PM2+

Merlin
2000S
Page 15

Merlin
1000V
Page 26

Merlin
CT1750+
Page 11

OFTEN
USED
WITH



The Merlin PM2+ Current Monitor is a dual fan current monitor and is to be used in conjunction with the Merlin systems: the unit can be used as an alternative to an air pressure differential switch.

OFTEN
USED
WITH

Merlin
CT1200S
Page 14

Merlin
1000V
Page 26

Merlin
CT1650+
Page 12

CS1/CS2

The Merlin CS1 & CS2 Current Switch is to be used in conjunction with the Merlin range of ventilation interlock systems and can be used as an alternative to air pressure differential switches.



OFTEN
USED
WITH

Merlin
3000S
Page 10

Optical Sensor

The Optical Sensor emits a beam across the kitchen canopy, if the beam is interrupted by excess smoke/steam it will send a signal back to the control panel.



Duct Thermostat



Merlin
3000S
Page 10

OFTEN
USED
WITH

The Duct Thermostat provides a control signal back to the Merlin control panel depending on the temperature in the duct work.

As the duct temperature becomes too hot the Merlin control system can increase ventilation.

Speed Controller

We stock a full range Electronic fan speed controllers. This range of fan speed controllers can be used with most Fans / Motors which is single phase – 240 volts and fan speed controllable using either 2 or 3 wire control.



Inverter



S&S Northern Ltd offer a large range of invertors for use with our Merlin control panels, ventilation units & industrial pumps.

Our invertors are available in single phase & three phase and cover a range from 0.75KW up to 24KW so suitable from the smallest kitchen fan to very large industrial pumps.

Gas Meter

We offer gas meters to cover all domestic & commercial buildings from ¼" diaphragm gas meters, up to 6" inline quantometers.

Our gas meters come with a range of outputs, most commonly a pulsed output but there is the option for other communications such as MODBUS, MBUS etc.



Water Meter



S&S offer a large range of cold water meters & hot water meters from small domestic type installations to large commercial and industrial properties.

The connections which come with the meters vary with the meter size & type, but connections are available to be added for all sizes for pulsed output, MBUS etc.

- **Compliance** -
MID Approved, WRAS Approved
- **Communication Outputs Available** -
Pulsed, MBUS, Wireless MBUS
- **Temperature** -
Cold & Hot
- **Connection Size** -
15mm – 300mm

Heat Meter



As part of our metering range, we are also able to offer heat meters for domestic & commercial premises. These are available using both inline and clamp-on types and come with a range of communications available as standard.

Gas Solenoid Valve CPI Switch

The closed position switch can be used on Goldseal gas solenoid valves to indicate position of the valve

Type Numbers

CPI-20/25 for valve size 3/4" & 1"
CPI-32/40 for valve sizes 1.1/4" & 1.1/2"
CPI-50 for valve size 2"
CPI-65/80 for valve size 2.1/2" & 3" BSP & Flanged
CPI-100 for valve size 4" Flanged



Bump Test Kit

We offer a full range of bottled test gases and testing equipment. The Bump kits are used to check and maintain gas detectors.

- Carbon Monoxide
 - Methane
 - LPG
 - Nitrogen
- Others available on request



Spec Wizard

www.snsnorthern.com/spec-wizard/

Ensure your project has the correct equipment

Here at S&S Northern we ensure your project is meeting all the latest gas regulations and recommendations.

As part of our dedication to continual progress and development, the S&S Northern team has developed the pioneering Spec Wizard. Spec Wizard is a dynamic resource that significantly reduces a consultant's workload by searching for and identifying the most appropriate equipment for a project, location or specification.

By simply answering questions from the drop down menu, Spec Wizard will instantly generate the ideal specification a consultant needs to meet various gas regulations on their project.

Spec Wizard will then create and email an equipment list which can then be directly used within a specification document, saving hours of time and money during the research and sourcing stages.

For help with the Spec Wizard or if you would like one of S&S Northern's technically trained sales engineers to explain the process over the telephone, please call us on +44 (0) 1257 470 983

Book Your Free CIBSE Accredited Webinar

Do your projects include Boiler/PlantRooms? Laboratories? Commercial kitchens? Receive up to date knowledge of Gas Safety Regulations.



Two CPD Sessions

CPD 1

Gas Safety Guidelines
For Commercial
Buildings

- ✓ CO2 Monitoring in schools & classrooms – ASHRAE / REVHA / CIBSE Guidance / DFE Guidance
- ✓ Gas Safety in School Boiler Houses / Plant Rooms – BS6644 & BB101
- ✓ Gas Safety & Utility Control with Science Classrooms – IGEM/ UP11
- ✓ Energy Saving & Demand Controlled Ventilation – DW172 & BS6173

CPD 2

Monitoring, Metering &
Detection For
Commercial Buildings

- ✓ Major Water Leak Detection (BREEAM WAT 03)
- ✓ Water Monitoring (BREEAM WAT 02)
- ✓ Part L – 2022 Update (Monitoring & Sub-Metering)
- ✓ BREEAM HEA02 – Energy Saving & Indoor Air Quality
- ✓ Refrigerant Detection (BREEAM 2018 Pol 1 & F Gas Requirements)

Head Office

S&S Northern Ltd Wallace
Francis House Barnes
Wallis Way Buckshaw
Village Chorley
Lancashire
PR7 7JN

T +44 (0) 1257 470 983
E info@snsnorthern.com

