


Pressure Transmitter

Specifications

Measuring media	Oil, water, gas and other media compatible with 316L stainless steel
Sensor	Stainless diffused silicon
Diaphragm	316L stainless steel
Supply voltage	9-30VDC
Output voltage	0-5VDC
Electrical connection	DIN 43650
Pressure range	0-10Bar
Maximum pressure	150% FS of rated pressure
Accuracy	±0.25% FS
Nonlinear	< ±0.2% FS
Hysteresis and repeatability	< ±0.1% FS
Long term stability	< ±0.1% FS/year
Zero drift	< ±0.1% FS/°C
Response time	< 500ms
Operating temperature	-40 ~ 80 °C
Connectivity	1/4" BSP
Protection class	IP65
Certification	CE, ISO

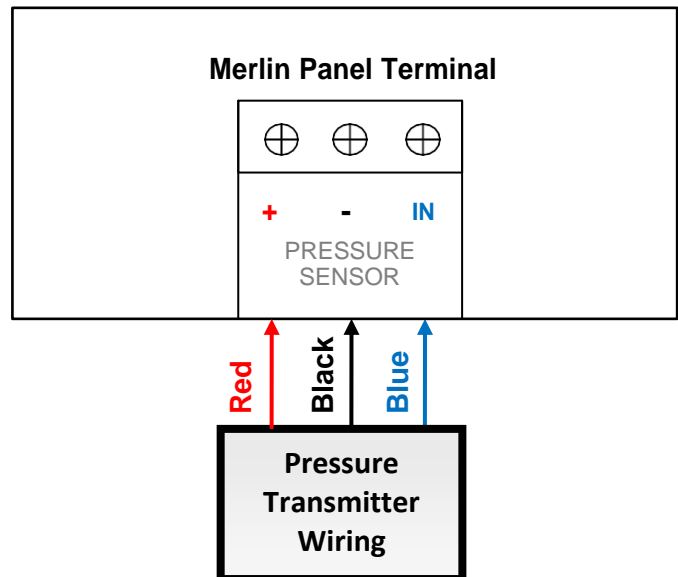

If you have any further queries, please contact S&S Northern Limited



S&S Northern Limited

Tel: 01257 470983

Fax: 01257 471937

www.snsnorthern.com

Rev: 02 Date: 08-01-18

INFORMATION ON WASTE DISPOSAL FOR CONSUMERS OF ELECTRICAL & ELECTRONIC EQUIPMENT

When this product has reached the end of its life it must be treated as Waste Electrical & Electronics Equipment (WEEE). Any WEEE marked products must not be mixed with general household waste, but kept separate for the treatment, recovery and recycling of the materials used. Please contact your supplier or local authority for details of recycling schemes in your area.