

Description

The EP-TL2 is for installing in a position where a fire hazard may occur, e.g. above boilers and interrupt the electrical supply to a gas valve or alarm. The link consists of a cast aluminium enclosure with a perforated cover having a temperature sensitive fuse.



Features


- Cast Aluminium Housing
- Replaceable Thermal Fuse



Technical Specification

Switch Rating: 5A @ 240Vac SPDT
 Melting Point: 72°C
 Housing Dimensions: 75 x 50 x 30mm

Wiring Connections

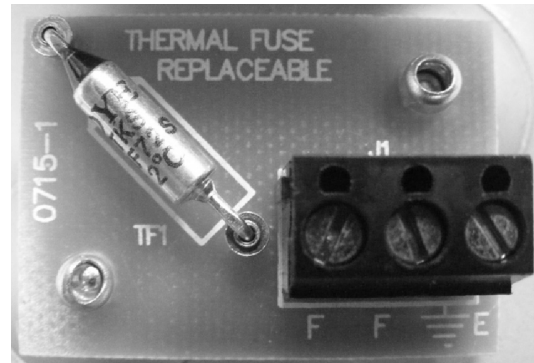

Order Codes

EP-TL2 Electro Thermal Link
 EP-TLF Replacement Fusible Link 72°C

Installation

Warning: Hazardous voltage can cause electrical shock. Disconnect power before proceeding with any work on this equipment.

Procedure:

1. Remove ventilated cover
2. Mount using the base as a template for holes
3. Ensure unit is mounted with perforated cover pointing downwards and ventilation slots are not blocked
4. Make necessary electrical connections
5. Replace cover