

# COPS Datasheet

## Carbon Monoxide ParkSafe Detector



24VDC Power Input



Used With The  
ParkSafe Controller



Traffic Light  
Indicator Display  
Changes Color  
Dependent On Gas  
Levels



BMS  
Communications



Modern & Compact  
Design



Up To 16 Detectors  
Can Be Linked Together



Plug & Play  
Installation




End of Operational Life  
& Annual Service  
Notifications to  
ParkSafe Controller

## Product Overview

The ParkSafe range of detectors work in combination with the Merlin ParkSafe, a Gas Detection & Ventilation Controller specifically designed for Parking Garage CO & NO2 monitoring. The COPS features a electrochemical sensor for industrial and commercial indoor applications. Compact, modern, digital design makes the units aesthetically pleasing and easy to install.

## Popular Applications

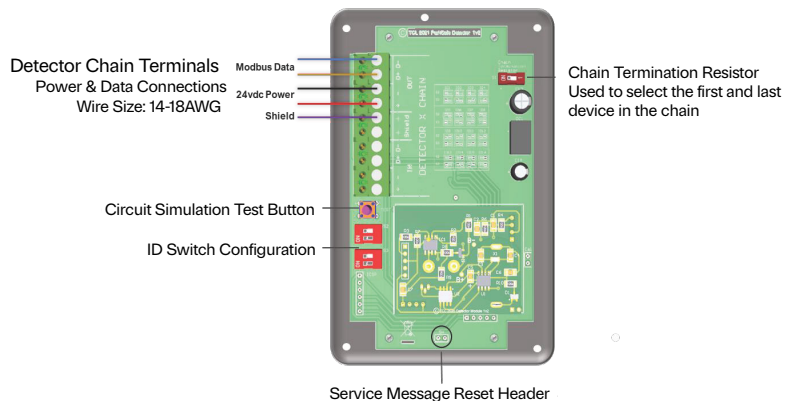

# Technical Specification

General							
Model:	ParkSafe Detector						
Gases:	Carbon Monoxide						
Size: (H x W x D)	125mm x 80mm x 35mm						
Housing Material:	ABS						
Mounting:	Wall Mounting – No limits - Non-Hazardous Areas						
Weight:	45g						
User Interface							
Display:	LED						
Visual Indicators:	Power / Alarm / Fault						
Audible Alarm:	None						
Power Supply							
Power Consumption:	15mA Max @ 24Vdc						
DC Power:	12-32Vdc (24vdc Nominal)						
Internal Fuse:	N/A						
Equipment							
Pollution Degree:	2						
Equipment Class:	2						
Environmental							
Ingress Protection:	Not Formally Evaluated						
Operating:	-10 ~ 50°C / 14 ~ 122°F 30 ~ 80% RH (non-condensing)						
Storage:	-25 ~ 50°C / -13-122F° up to 95% RH (non-condensing)						
Altitude Rating:	2000m						
Wiring							
Typical	Copper 18AWG (0.75mm <sup>2</sup> ) Min. 8x screw terminals.						
Other							
Communication	RS485 MODBUS RTU						
Sensor Specification							
Factory Calibration Conditions	25° ± 5°C - 77° ± 41°F (40-70% RH)						
Sensor Type	Electromechanical						
Gas Sensor	Measuring Range (ppm)	Calibration Gas	Response (T90)	Recovery (T10)	Alarm: 1 (Pre alarm warning)	Alarm: 2	*EOL (Years)
Carbon Monoxide (CO)	0-1000ppm	120ppm CO	<60s	<50s	▲25ppm	▲100ppm	5



## Area of coverage

Consider the coverage required and function of the area. Emphasis should be placed on airflow patterns and correct placement, not perceived detecting ranges.

The COPS monitor should be installed approximately 1.2-1.5m from the ground level.

Find out more

**S&S Northern Ltd**

[www.snsnorthern.com](http://www.snsnorthern.com)

Head office:

Units 1-4 Barnes Wallis Way, Buckshaw Village,  
Lancashire, PR7 7JN

Tel: 01257 470983

Email: [info@snsnorthern.com](mailto:info@snsnorthern.com)

